

ROUGH OPENING, INTERIOR ELEVATION

WALL SECTION VIEW


NOTES:
 ROUGH OPENING: 60.5"(W) X 54"(H)
 AVAILABLE DRAWERS:
 C-150 TRANSFER AREA 9"X21"X13"
 C-130 TRANSFER AREA 7"X18"X13"
 C-130E TRANSFER AREA 7"X18"X13"

OPERATION: C-150/C-130 MANUAL
 C-130E ELECTRICAL

FINISH:
 EXTERIOR BODY: 18 GA. S/S
 INTERIOR BODY: 18 GA. S/S
 MIC AND SPEAKER GRILL: 18 GA S/S
 SECURITY SLIDE LID: 16 GA. S/S
 TRANSFER AREA: 18 GA. S/S WITH WHITE PVC SIDE PANELS
 FRONT PANEL: 14 GA. S/S BACKED WITH 16 GA. S/S HANDLE: HDPE (HIGH DENSITY POLYETHYLENE) WHITE SLIDE RAILS: ZINC PLATED STEEL LOCK BAR: 6061 ALUMINUM

ELECTRICAL VERSION
 REQUIRES 110VAC 20AMP CIRCUIT TO DUPLEX OUTLET CENTERED BELOW DRAWER OPENING 24" A.F.F.

NOTE:
 ALUMINUM FRAMING IS NOT BULLET RESISTANT RATED.
 THIS UNIT MUST BE INSTALLED LEVEL AND SQUARE TO OPERATE PROPERLY.

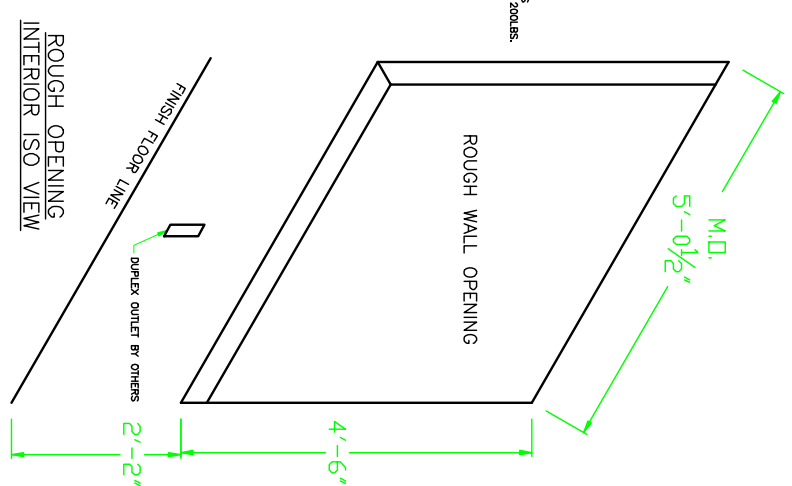

ROUGH OPENING
 INTERIOR ISO VIEW

Quick Tube Systems, Inc.			
PCJ - 130 MASONRY OPENING			
Houston, TX			
832-717-0549	SCALE	DESIGN	DATE
	1/8" = 1'	RJB	1/1/13
C Drive: Drawings		APPROVED	DATE
			PCJ-130