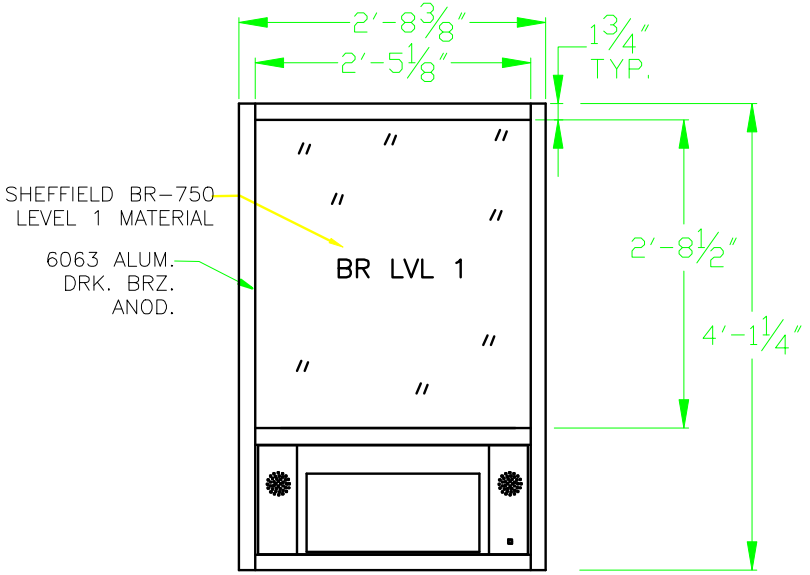

ELEVATION VIEW

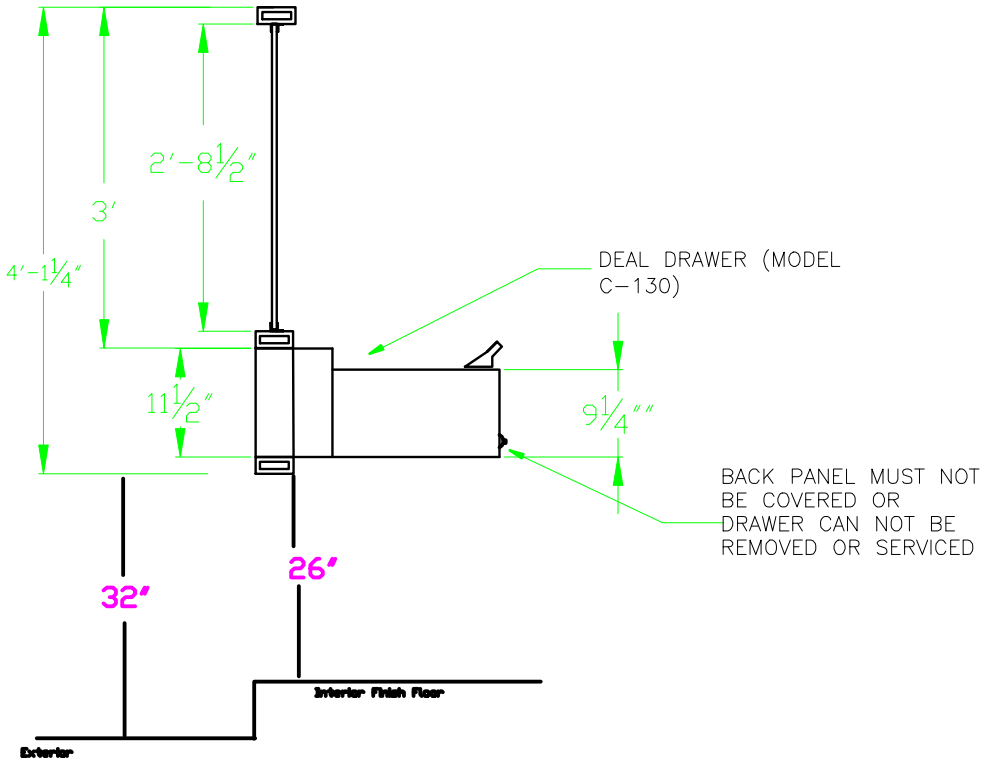

SECTION VIEW

NOTES:
ROUGH OPENING: 32 3/4"(w) x 49 5/8" (h)
ACTUAL DIMENSION: 32 3/8"(w) x 49 1/4"(h)
OPERATION: MANUAL Operation

FINISH:
EXTERIOR BODY: 18 GA. S/S
INTERIOR BODY: 18 GA. S/S
MIC AND SPEAKER GRILL: 18 GA S/S
SECURITY SLIDE LID: 16 GA. S/S
TRANSFER AREA: 18 GA. S/S WITH WHITE PVC SIDE PANELS
FRONT PANEL: 14 GA. S/S BACKED WITH 16 GA. S/S
HANDLE: HDPE (HIGH DENSITY POLYETHYLENE) WHITE HANDLE
SLIDE RAILS: ZINC PLATED STEEL
LOCK BAR: 6061 ALUMINUM

WEIGHT: 140 LBS.

TRANSFER AREA SIZE: 7" X 18" X 13"

TRANSFER AREA CAPACITY: 1755 CUBIC INCHES

NOTE:
ALUMINUM FRAMING IS NOT BULLET RESISTANT RATED.

THIS UNIT MUST BE INSTALLED LEVEL AND SQUARE TO OPERATE PROPERLY.

PCM – 130
DETAIL SHEET

Quick Tube Systems, Inc.
832-717-0549 Houston, TX

DATE	SCALE	DRAWN	APPROVED	DRAWING #
03/04/08	NTS	RJE		PCM – 130

FILE: C Drive: Drawings