


## Installing and Using the 1540 Series Lane Station Handsets

The Model 1540 Lane Station Handset surface-mounts on any convenient surface and provides private customer audio in Series 1500™ professional intercoms. It can be mounted to the front, side, top or bottom of equipment or walls. A 1540 Series unit plugs into a 1520 Lane Station, automatically providing teller call notification when the handset is lifted from its cradle. The similar Model 1541 is flush-mounted. These units can be installed on standard two-gang electrical boxes, if desired.

### Installation

1. Complete installation and testing of the 1500 Series intercom. Unpack the handset unit and its accessories.
2. If installing a 1541 flush-mount handset, skip to Step 3. If installing a 1540 surface-mount handset, place its case in the desired location, trace the hole locations and drill the mounting surface, or rough-in a two-gang electrical box.
3. If installing a 1541 flush-mount handset, cut out and drill the mounting surface using the cutting template shown, or rough-in a two-gang electrical box.
4. Plug the 7-foot modular cable from the handset unit into the Handset port of the 1520/21 Lane Station. If necessary, a modular cable up to 25 feet long may be used. Secure the handset unit to the mounting surface or electrical box with the supplied screws, being careful not to pinch any wires.
5. Plug any unused holes on the 1540 with the black plastic plugs supplied.
6. Cradle the handset. With the intercom system powered up, pick up the handset. The teller call tone will sound at the Counter Station. Talk to an assistant at the Counter Station. The handset audio levels are preset at the factory, but can be readjusted to suit unusual ambient conditions. Cradle the handset to restore open speaker and microphone operation.

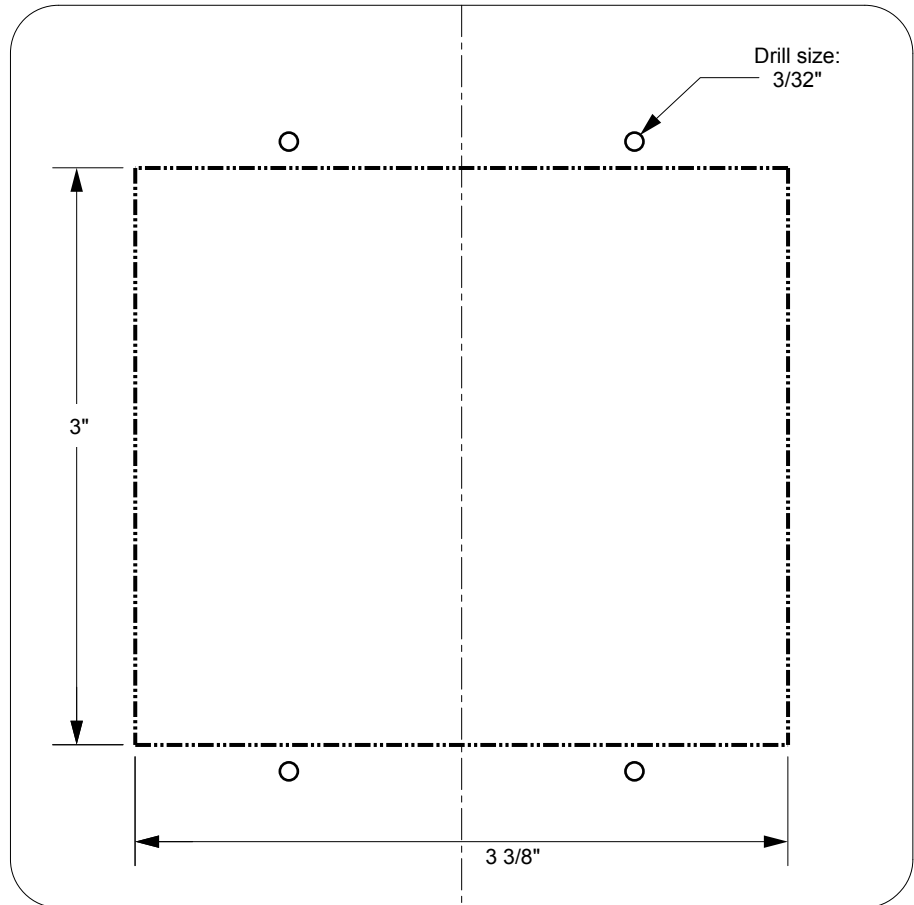

### Troubleshooting

If any problem should arise that is not discussed in these instructions, call the Audio Authority Technical Service Department at 800-322-8346. Business hours are 8:30 AM to 5:00 PM, M - F, EST.

**Audio Authority**®

2048 Mercer Road, Lexington, Kentucky 40511-1071  
Phone: 859-233-4599 • Fax: 859-233-4510  
Customer Toll-Free USA & Canada: 800-322-8346  
Website: <http://www.audioauthority.com>

752-484  
7/05